

## Specific Strength Attributed Self-Compacting Load Bearing Lightweight Roof/ Floor Screed Using Sintered Lightweight Aggregates





## **Technology in Brief:**

This innovative Self-Compacting lightweight concrete mix was developed to solve a real-world challenge - creating a material that's not only strong but also lightweight and easy to work with. By blending **low carbon cement binder** (with clinker factor up to 50%) with **lightweight expanded clay aggregates** (LECA), the team developed a self-compacting concrete that flows easily into place without needing vibration. A modern **superplasticizer/viscosity modifier** helps keep the mix smooth and stable, preventing clumps or cracks. What makes it truly special is how it balances performance and sustainability: it reaches a concrete matrix with > 25 MPa strength, reduces weight by up to 30%, cuts CO<sub>2</sub> emissions by 16-20%, and even lowers construction costs by around 13-15%. It is a smart, eco-friendly solution—perfect for roofs and floors where reducing dead load matters, and ideal for today's energy-efficient buildings.

## Salient Features/Advantages:

- Self-Compacting
- Lightweight Composition
- High Workability
- Dimensional Stability
- Adequate Compressive Strength
- Low Thermal Conductivity
- Eco-Friendly and Sustainable

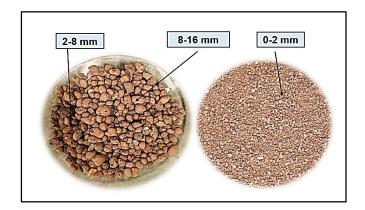

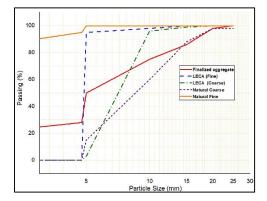





Particle size distribution of Natural coarse and fine aggregates, LWA and finalized aggregate

Properties & Standards	IS 9142, IS 2386 (Part 1 to 3)
End Product (s)	Self-Compacting Load Bearing Lightweight Roof/ Floor Screed
License/Commercialization	The technology is ready for licensing and commercialization.
TRL	7
Environmental Impact	Reduces CO <sub>2</sub> emissions by 16-20%, lowers natural resource use,
	and enhances energy efficiency in buildings.